Cam Solenoid Control

Last Changed: 13/11/2017
Harness Required: MEX01-2

Note: Make sure the stripe ofthe Diode is connected on the positive side.

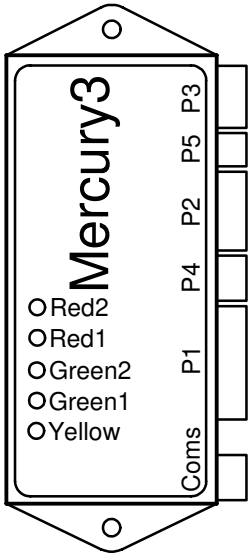

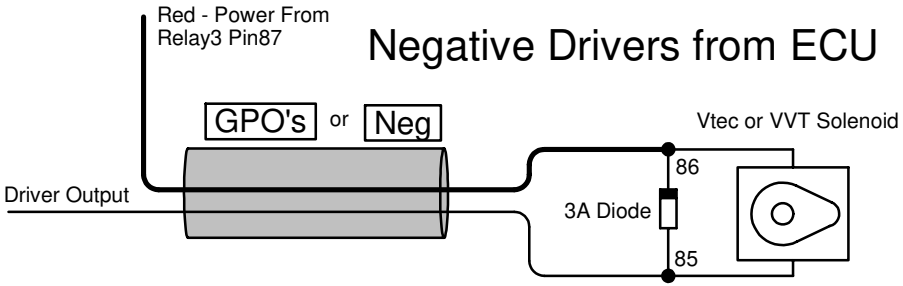

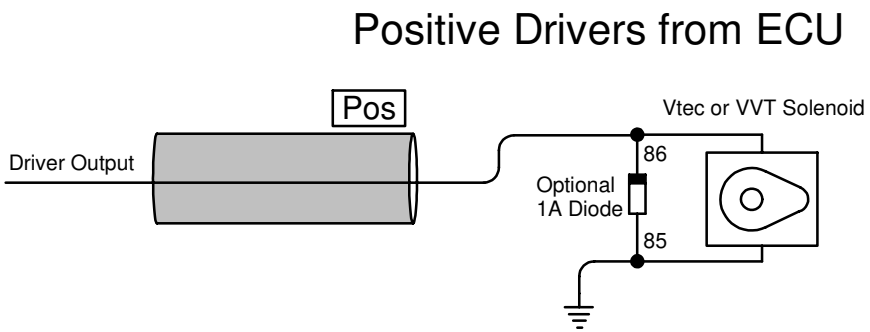

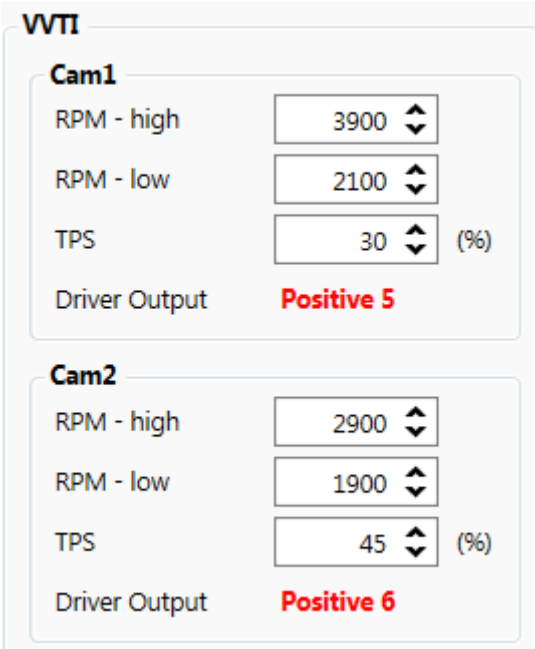

Note: The connection to the Mercury ECU changes with the GP Output Priority selection, View the Priority spreadsheet for the specific firmware to see which output is selected. Then make sure on how to connect between the 2 options above. It could be connected on a negative or positive driver.